


# KARMA®

— GLEMM — rídem —

SCHEDA TECNICA / TECHNICAL SHEET

## SET 8202

Dual UHF wireless handheld microphone

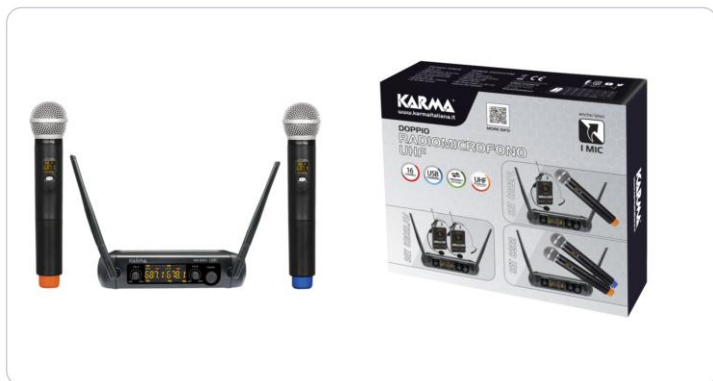

Dual wireless handmic operating in UHF band. Both the microphones and the receiving base are endowed with display for the operating frequency control and battery charge level.

The receiving base is powered by an ordinary USB socket (cable and power adaptor included). Thanks to this peculiarity it can be connected to amplified speakers, mixers, power banks, notebooks or any device endowed with USB socket. Another exclusive feature is the possibility to change the operating frequency (16 channels available) directly from the microphone, rather than from the base. Thanks to the practical XLR and Jack 6,3 mm sockets it is possible to obtain an easy and professional connection.

Frequency range A: from 679.100 MHz to 694.100 MHz

Frequency range B: from 663.100 MHz to 678.100 MHz

<b>Autonomy</b>	Min 8 hours
<b>Output connectors</b>	XLR + 6,3mm Jack
<b>Display</b>	Yes
<b>Diversity system</b>	No
<b>Frequency type</b>	UHF
<b>Operating range</b>	50m
<b>Receiver dimensions</b>	175 x 40 x 120 mm
<b>Frequency response</b>	30Hz - 20 KHz
<b>Carrying case</b>	No
<b>Color</b>	black
<b>Weight</b>	1,3
<b>Product dimensions</b>	175 x 40 x 120 mm
<b>Power supply</b>	Through USB
<b>Notes</b>	Frequency range: CH 1 : 679.100 - 694.100 - CH 2 663.100 - 678.100 Mhz

DOWNLOAD 

Scarica ora  
il catalogo aggiornato



SCOPRI TUTTE LE NOVITÀ  
SUL NOSTRO SITO

[www.karmaitaliana.it](http://www.karmaitaliana.it)



8015439282028

Karma Italiana srl si impegna affinché le informazioni contenute in questa scheda siano le più precise possibili. Allo scopo di migliorare i propri prodotti, Karma Italiana si riserva il diritto di apportare modifiche ai propri prodotti senza alcun preavviso. Tutti i prodotti Karma sono conformi alle normative vigenti dell'Unione Europea.