

PRODUCT TECHNICAL SHEET


30 June 2024

PAA 100TP

100W amplifier with phantom

This amplifier can be powered both by 220V mains power and by 12V-24V battery. It offers the possibility to control 2 microphones and 3 line signals and features output RCA sockets to connect a recorder or another external device. It is endowed also with a 10V phantom power socket for condenser microphones. It is suitable to connect speakers for 4-8 Ohm as well as 70/100V operation. It includes a MP3 player, a bluetooth receiver and a practical FM radio receiver. The inputs' volume can be adjusted independently. It is possible to modify high and low output tones. Remote control included.

MP3 compatible	Yes
Input connectors	RCA + 6,3mm Jack
Output connectors	RCA
Line inputs	3
Mic inputs	2
Impedance	4 - 8 Ohms
Constant voltage	70 - 100V compatible
Multi zone	No
8 Ohm max power	100W
Frequency response	100Hz - 20 KHz
Voice priority function	No
VU METERS	No
Phantom Key	Yes, it allows to enable phantom power for condenser microphones
RMS power	50W
Matrix	No
Max power	100
DC Power	12V - 24V
Bluetooth	Ver. 5.0
Color	black
Weight	5,8
Product dimensions	363 x 93 x 290mm
Power supply	AC 220V, DC 12-24V
Notes	Remote control included

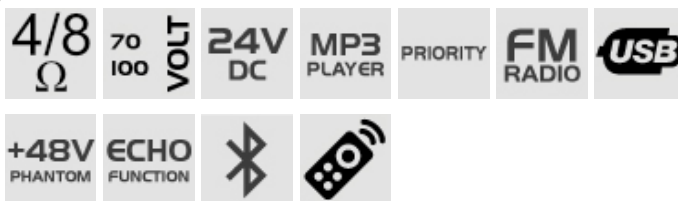

Puoi trovare articoli correlati, accessori ed aggiornamenti su:

www.karmaitaliana.it

Inoltre potrai scaricare i nostri cataloghi in formato PDF per:

- DeeJay - Mixer & Disco Light - Microfoni e raddiomicrofoni - Alimentatori / accessori - Staffe porta TV - Amplificazione stereo - Diffusori passivi / amplificati - Sicurezza



8015439191009