


KARMA®

— GLEMM — rídem —

SCHEDA TECNICA / TECHNICAL SHEET

PAA 6200TMZ

1200W 6 zone PA amplifier

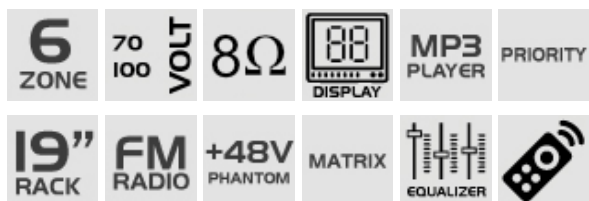

Powerful multifunction amplifier with matrix selector to manage 6 zones independently. It is endowed with 1 microphone input with siren and priority function, 2 combined mic-phantom-line sockets and 4 sockets for line type signals.

It is suitable both for 8 ohm and 70-100V connections. Independent control of high and low tones on channels 1-4. Each zone can also play separate sources. Its Mp3 module can play files from USB and SD. It also includes a FM radio tuner and a headphone socket with specific source selector.

Matrix	Yes
Max power	1200
RMS power	6 x 100W
Impedance	8 Ohms
Multi zone	6 zones, each with independent volume
Voice priority function	Yes
VU METERS	No
Phantom Key	Yes, it allows to enable phantom power for condenser microphones
Tel paging function	No
REC function	No
Mp3 player	Yes
MP3 compatible	Yes
CD/ USB	It includes USB module with display
Cooling fan	1 fan
Siren & Whistle	No
Rack space	3U
Input connectors	XLR + RCA + Jack 6,3mm
Output connectors	Terminals
Line inputs	4
Mic inputs	3
Constant voltage	70 - 100V compatible
Frequency response	80 HZ-18 KHZ
Color	Black
Weight	17
Product dimensions	420x134x390 mm
Power supply	110V - 220V
Notes	Remote control

DOWNLOAD 

Scarica ora
il catalogo aggiornato



SCOPRI TUTTE LE NOVITÀ
SUL NOSTRO SITO

www.karmaitaliana.it



8015439162009

Karma Italiana srl si impegna affinché le informazioni contenute in questa scheda siano le più precise possibili. Allo scopo di migliorare i propri prodotti, Karma Italiana si riserva il diritto di apportare modifiche ai propri prodotti senza alcun preavviso. Tutti i prodotti Karma sono conformi alle normative vigenti dell'Unione Europea.