


# KARMA®

— GLEMM — rídem —

SCHEDA TECNICA / TECHNICAL SHEET

## PAA 350DAB

5 zone amplifier with DAB - 350W

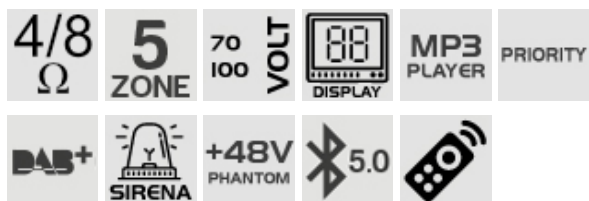

5 zone professional amplifier with built-in DAB+ module, MP3 player, bluetooth. It can manage 70V, 100V, 4 Ohm and 8 Ohm connections. It comes with 5 microphone inputs ( 4 of these with phantom power).

<b>Matrix</b>	No
<b>Max power</b>	350W
<b>Bluetooth</b>	Ver. 5.0
<b>RMS power</b>	175W
<b>Multizone</b>	5 zones
<b>8 Ohm max power</b>	350W
<b>Impedance</b>	4 - 8 Ohms
<b>Multi zone</b>	5 zones
<b>Voice priority function</b>	Yes
<b>VU METERS</b>	Yes
<b>Phantom Key</b>	Yes, it allows to enable phantom power for condenser microphones
<b>MP3 compatible</b>	Yes
<b>CD/ USB</b>	It includes USB module with display
<b>Siren &amp; Whistle</b>	Yes
<b>Rack space</b>	2U
<b>Input connectors</b>	XLR + RCA + Jack 6,3mm
<b>Output connectors</b>	Terminals
<b>Line inputs</b>	2
<b>Mic inputs</b>	5
<b>Constant voltage</b>	25 - 70 - 100V compatible
<b>Frequency response</b>	60 Hz - 15KHz
<b>Color</b>	black
<b>Weight</b>	12
<b>Product dimensions</b>	430 x 100 x 360 mm
<b>Power supply</b>	220V
<b>Notes</b>	Radio DAB/FM + Bbluetooth + remote control included

DOWNLOAD 

Scarica ora  
il catalogo aggiornato



SCOPRI TUTTE LE NOVITÀ  
SUL NOSTRO SITO

[www.karmaitaliana.it](http://www.karmaitaliana.it)



8015439103507

Karma Italiana srl si impegna affinché le informazioni contenute in questa scheda siano le più precise possibili. Allo scopo di migliorare i propri prodotti, Karma Italiana si riserva il diritto di apportare modifiche ai propri prodotti senza alcun preavviso. Tutti i prodotti Karma sono conformi alle normative vigenti dell'Unione Europea.