



## PRODUCT TECHNICAL SHEET

30 June 2024

### PAA 720MBZX

#### 720W 6 zone matrix amplifier

Professional matrix amplifier operating on 6 zones.


It features 3 mic inputs and line inputs (3 + 1 AUX) and a further channel for the MP3 module.

The mic inputs have a dual connector (XLR + 6,3mm jack) and are also compatible with +48 phantom power supply.

It is endowed with 4 outputs (with a RCA connectors) and a 6,3mm headphone socket on the front with specific volume control.

The volume of each zone can be adjusted independently. Thanks to the multimedia panel it is possible to play Mp3 files from USB sticks or SD cards, bluetooth 5.0 signals and FM radio. Each input has its own bass and treble control and offers the possibility to connect an external alarm signal or manage it from the front button (with volume adjustment). It can be connected to an external optional control panel (model PWC 2) or to a paging microphone (model PM 2).

By pressing the RPT (repeat) key once you can scan for the DAB/FM stations.

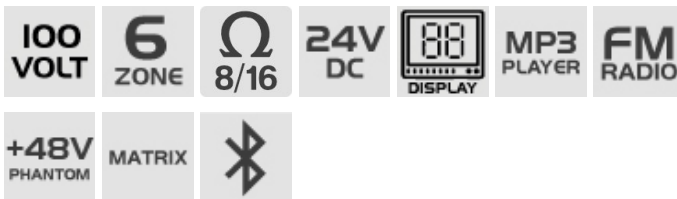

<b>Input connectors</b>	XLR + jack 6,3mm
<b>Output connectors</b>	terminals + RCA
<b>Line inputs</b>	3
<b>Mic inputs</b>	4
<b>Impedance</b>	8-16 Ohms
<b>Siren &amp; Whistle</b>	Yes
<b>Constant voltage</b>	100V compatible
<b>Multi zone</b>	6 zones, each with independent volume
<b>8 Ohm max power</b>	720W
<b>Frequency response</b>	80Hz - 16KHz
<b>VU METERS</b>	No
<b>RMS power</b>	360W
<b>Mp3 player</b>	Yes
<b>Tel paging function</b>	yes
<b>Matrix</b>	Yes
<b>Max power</b>	720W
<b>DC Power</b>	24V
<b>Bluetooth</b>	Ver. 5.0
<b>Color</b>	black
<b>Weight</b>	8 kg
<b>Product dimensions</b>	484 x 88 x 320mm
<b>Power supply</b>	220V

Puoi trovare articoli correlati, accessori ed aggiornamenti su:

[www.karmaitaliana.it](http://www.karmaitaliana.it)

**Inoltre potrai scaricare i nostri cataloghi in formato PDF per:**

- DeeJay - Mixer & Disco Light - Microfoni e raddiomicrofoni - Alimentatori / accessori - Staffe porta TV - Amplificazione stereo - Diffusori passivi / amplificati - Sicurezza



8015439107208